


## CONTROLLER

» Co-ordinate the operation of all modules within a configuration, permanently store relevant settings and communicate to the computer. Only one controller is required for any combination of modules.

All modules connect to the controller via the internal Tipro bus. They can be arranged in any order as a Tipro bus connector is located on either side of each module.

## MID-MU00B USB controller

- » Supports the protect function
- » Integrated cable with USB Type A connector
- » MiniDIN5 connector for external module connection

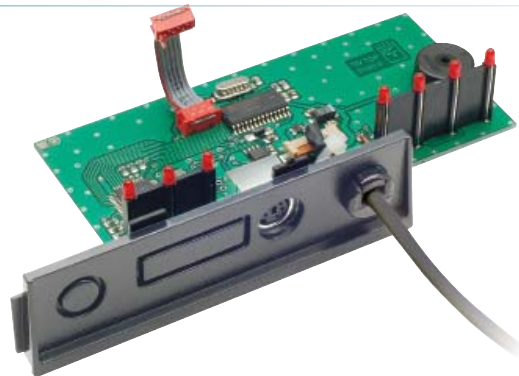

## FEATURES

- » Built-in buzzer for key click and warning tones
- » Non-volatile memory: 8 kB
- » Reprogrammable
- » Keeps data for more than 10 years (if disconnected from power)
- » 7 LEDs (4 for layer indication, Caps, Num and Scroll Lock indication)
- » 4 possible programmable layers
- » One internal Tipro bus connector
- » Supports up to 14 modules

## SOFTWARE UTILITY

### ChangeMe

#### » Programming the configuration.

Whatever the command you wish to program – whether to send complex strings, play warning tones, or use different interfaces simultaneously – you can use ChangeMe.

- » No technical knowledge is required
- » Automatic detection of connected configuration or keyboard
- » Permits downloading and uploading of data from file to keyboard and vice versa
- » All keys and combinations of keys can be programmed
- » Each key can be programmed in 4 layers
- » Distinguishes between simultaneously and subsequently pressed keys
- » Distinguishes between single and autorepeat functions for each key in each layer
- » Batch download (downloading programming file to the keyboard without using ChangeMe). Available also for Linux and MacOS.
- » Integrated testing utilities
- » Windows 2000/XP/Vista(x86) compatible

### Protect

- » A ChangeMe features added protection against misuse within the keyboard. It prevents the un-authorized use of certain key positions and key/keyboard combinations as defined by the user.
- » Permits security against unauthorised users.
- » Protects key combinations (e.g. Ctrl+Alt+Delete)
- » 4 levels of security
- » Login to keyboard alone – the password is not transferred to the computer
- » Protection data is stored within the keyboard.

	Power consumption:	Dimensions:	Packaging dimensions:	Package content:
MID-MU00B	25 mATYP	150 x 67 x 37 mm, 100 g	195 x 230 x 70 mm, 320 g	MID-MU00B, CD with programming utility, label for Caps, Num and Scroll Lock LEDs, label for layer indication LEDs, keycap removal tool

